



Configuration Schematic

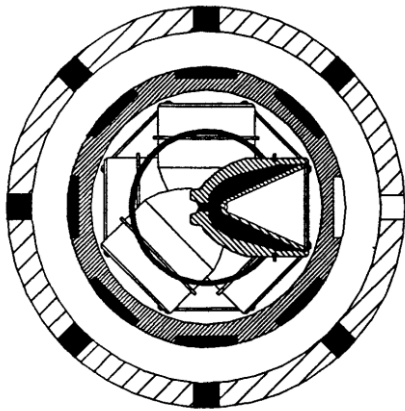

Shot Pattern

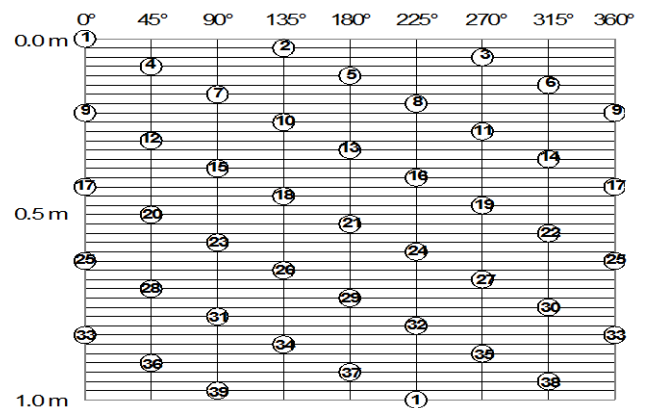

Technical Information

Carrier Specifications	
Gun Type	Expendable, Scaloped
Pressure Rating	130 MPa / 18,900 psi
Temperature Rating	230 °C / 450 °F
Tensile Strength	2,800,000 N / 630,000 lbs
Tandem Shot Spacing	0.40 m / 1.31 ft
Carrier Thread	3-15/16" - 6 TPI Acme

Only to be shot in fluid when using zinc charges


Shot Interval	Gun Length	Shot Total	Gun Weight w/o explosive components
1 m	1.33 m	40	35.0 kg net
2 m	2.33 m	79	60.5 kg net
3 m	3.33 m	118	86.5 kg net
4 m	4.33 m	157	112.5 kg net
5 m	5.33 m	196	138.5 kg net
6 m	6.33 m	235	164.0 kg net

Selection Chart


Item	1 m	2 m	3 m	4 m	5 m	6 m
Gun System for 15g DP	2314871	2314873	2314875	2314877	2314879	2314881
Charge Tube for 15g DP	2315212	2315214	2315216	2315218	2315220	2315222
Gun System for 19g to 22.7g DP	2315679	2315681	2315683	2315685	2315687	2315689
Charge Tube for 19g to 22.7g DP	2315694	2315696	2315698	2315700	2315702	2315704
Gun System for 22.7g BH	2314857	2314859	2314861	2314863	2314865	2314867
Charge Tube for 22.7g BH	2315199	2315201	2315203	2315205	2315207	2315209
Gun System for 22.7g BH2	2316955	2316957	2316959	2316961	2316963	2316965
Charge Tube for 22.7g BH2	2316968	2316970	2316972	2316974	2316976	2316978
Carrier	2315015	2315017	2315019	2315021	2315023	2315025
Retention Ring	7902761					
Booster Kit	2315319					
Spacer Gun Kit	2315371					

Guns are available at 0.5m increments to a length of 7m with part numbers on request

Configuration Schematic

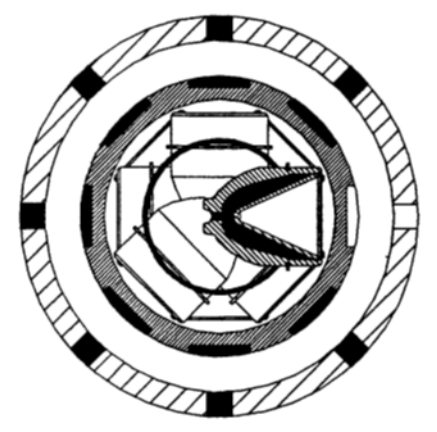

Shot Pattern

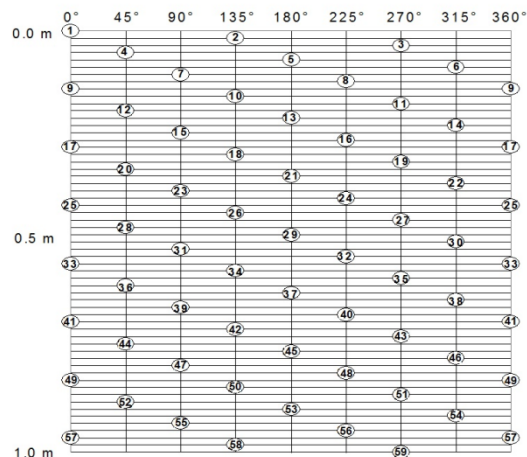

Technical Information

Carrier Specifications	
Gun Type	Expendable, Scalloped
Pressure Rating	130 MPa / 18,900 psi
Temperature Rating	230 °C / 450 °F
Tensile Strength	2,800,000 N / 630,000 lbs
Tandem Shot Spacing	0.40 m / 1.31 ft
Carrier Thread	3-15/16" - 6 TPI Acme

Note: Only to be shot in fluid when using zinc charges


Shot Interval	Gun Length	Shot Total	Gun Weight w/o explosive components
1 m	1.33 m	60	35.0 kg net
2 m	2.33 m	119	60.5 kg net
3 m	3.33 m	178	86.5 kg net
4 m	4.33 m	237	112.5 kg net
5 m	5.33 m	296	138.5 kg net
6 m	6.33 m	355	164.0 kg net

Selection Chart


Item	1 m	2 m	3 m	4 m	5 m	6 m
Gun System for 15g DP / BH	2326087	2326088	2326089	2326090	2326091	2326092
Charge Tube for 15g DP / BH	2326093	2326094	2326095	2326096	2326097	2326098
Carrier	2326099	2326100	2326101	2326102	2326103	2326104
Retention Ring	7902761					
Booster Kit	2315319					
Spacer Gun Kit	2315371					

Note: Guns are available at 0.5m increments to a length of 7m with part numbers on request

Configuration Schematic

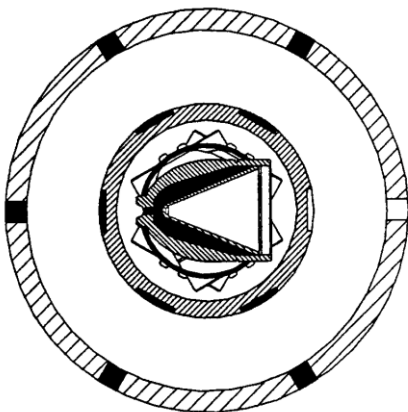

Shot Pattern

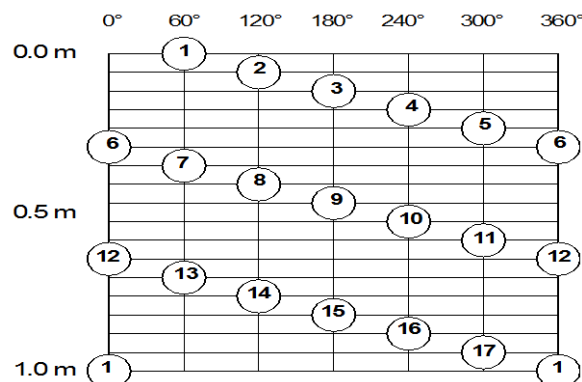

Technical Information

Carrier Specifications	
Gun Type	Expendable, Scalloped
Pressure Rating	130 MPa / 18,900 psi
Temperature Rating	230 °C / 450 °F
Tensile Strength	2,800,000 N / 630,000 lbs
Tandem Shot Spacing	0.42 m / 1.37 ft
Carrier Thread	3-15/16" - 6 TPI Acme

Only to be shot in fluid when using zinc charges


Shot Interval	Gun Length	Shot Total	Gun Weight w/o explosive components
1 m	1.33 m	17	35.0 kg net
2 m	2.33 m	34	60.5 kg net
3 m	3.33 m	50	86.5 kg net
4 m	4.33 m	67	112.5 kg net
5 m	5.33 m	83	138.5 kg net
6 m	6.33 m	100	164.0 kg net

Selection Chart


Item	1 m	2 m	3 m	4 m	5 m	6 m
Gun System for 19g to 24g DP	2323875	2323877	2323878	2323879	2323880	2323881
Charge Tube for 19g to 24g DP	2323882	2323883	2323884	2323885	2323886	2323887
Gun System for 32g DP1/DP2/BH	2314844	2314846	2314848	2314850	2314852	2314854
Charge Tube for 32g DP1/DP2/BH	2315186	2315188	2315190	2315192	2315194	2315196
Gun System for 39g DP	2315577	2315579	2315582	2315584	2315587	2315590
Charge Tube for 39g DP	2315707	2315709	2315711	2315713	2315716	2315718
Gun System for 39g DP2	2317439	2317441	2317443	2317445	2317447	2317449
Charge Tube for 39g DP2	2317452	2317454	2317456	2317458	2317460	2317462
Carrier	2315002	2315004	2315006	2315008	2315010	2315012
Retention Ring	7902761					
Booster Kit	2315319					
Spacer Gun Kit	2315371					

Guns are available at 0.5m increments to a length of 7m with part numbers on request

Configuration Schematic

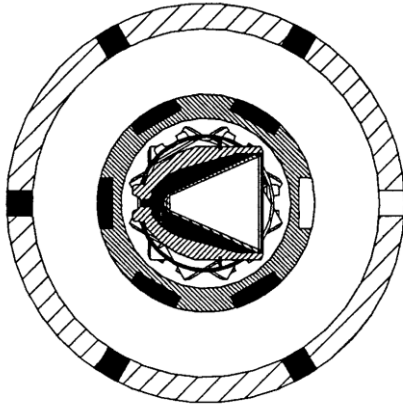

Shot Pattern

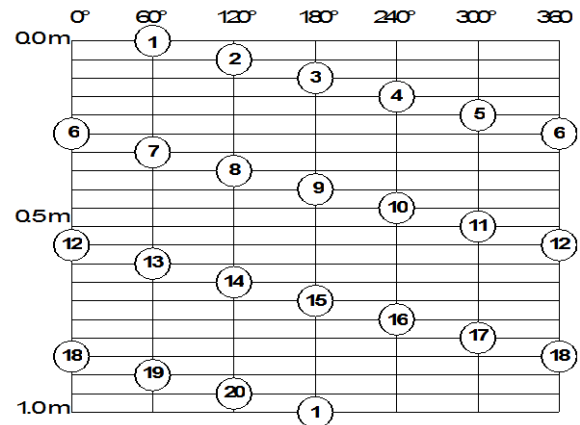

Technical Information

Carrier Specifications	
Gun Type	Expendable, Scalloped
Pressure Rating	130 MPa / 18,900 psi
Temperature Rating	230 °C / 450 °F
Tensile Strength	2,800,000 N / 630,000 lbs
Tandem Shot Spacing	0.40 m / 1.31 ft
Carrier Thread	3-15/16" - 6 TPI Acme

Only to be shot in fluid when using zinc charges


Shot Interval	Gun Length	Shot Total	Gun Weight w/o explosive components
1 m	1.33 m	21	35.0 kg net
2 m	2.33 m	41	60.5 kg net
3 m	3.33 m	61	86.5 kg net
4 m	4.33 m	81	112.5 kg net
5 m	5.33 m	101	138.5 kg net
6 m	6.33 m	121	164.0 kg net

Selection Chart


Item	1 m	2 m	3 m	4 m	5 m	6 m
Gun System for 19g - 24g DP / 23g GH	2316533	2316535	2316537	2316540	2316542	2316544
Charge Tube for 19g - 24g DP / 23g GH	2316547	2316550	2316552	2316554	2316556	2316558
Gun System for 26g DP / 26g GH	2316194	2316196	2316198	2316200	2316202	2316204
Charge Tube for 26g DP / 26g GH	2316207	2316209	2316211	2316213	2316215	2316217
Carrier	2316221	2316223	2316225	2316227	2316229	2316231
Retention Ring	7902761					
Booster Kit	2315319					
Spacer Gun Kit	2315371					

Guns are available at 0.5m increments to a length of 7m with part numbers on request

Configuration Schematic

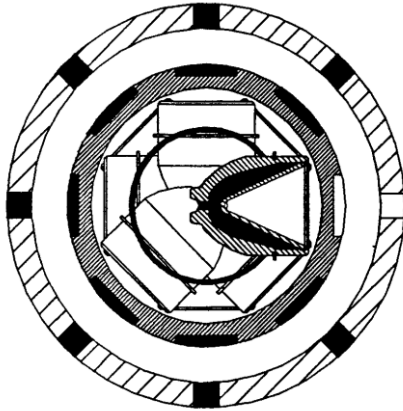

Shot Pattern

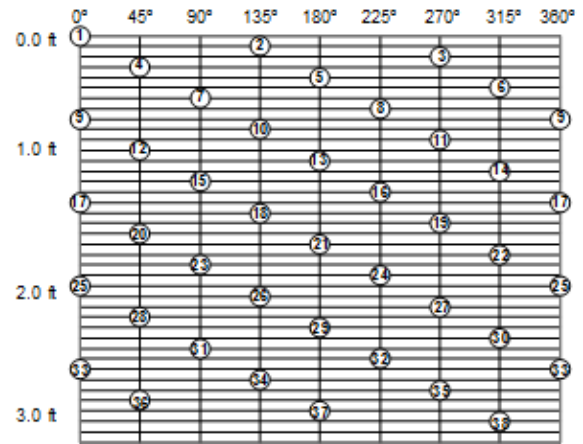

Technical Information

Carrier Specifications	
Gun Type	Expendable, Scaloped
Pressure Rating	130 MPa / 18,900 psi
Temperature Rating	230 °C / 450 °F
Tensile Strength	2,800,000 N / 630,000 lbs
Tandem Shot Spacing	0.40 m / 1.31 ft
Carrier Thread	3-15/16" - 6 TPI Acme


Shot Interval	Gun Length	Shot Total	Gun Weight w/o explosive components
4 ft	5.1 ft	49	77.2 lbs net
6 ft	7.1 ft	73	133.4 lbs net
10 ft	11.1 ft	121	190.7 lbs net
14 ft	15.1 ft	169	248.0 lbs net
20 ft	21.1 ft	241	305.3 lbs net

Only to be shot in fluid when using zinc charges


Selection Chart

Item	4ft	6ft	10ft	14ft	20ft
Gun System for 15g DP	?	?	?	?	?
Charge Tube for 15g DP	?	?	?	?	?
Gun System for 19g to 22.7g DP	2325409	2325410	2325411	2325412	2325413
Charge Tube for 19g to 22.7g DP	2325399	2325400	2325401	2325407	2325408
Gun System for 22.7g BH	?	?	?	?	?
Charge Tube for 22.7g BH	?	?	?	?	?
Gun System for 22.7g BH2	2325402	2325403	2325404	2325405	2325406
Charge Tube for 22.7g BH2	2325417	2325418	2325419	2325420	2325421
Carrier	2325362	2325363	2325365	2325366	2325367
Retention Ring	7902761				
Booster Kit	2315319				
Spacer Gun Kit	2315371				

Configuration Schematic

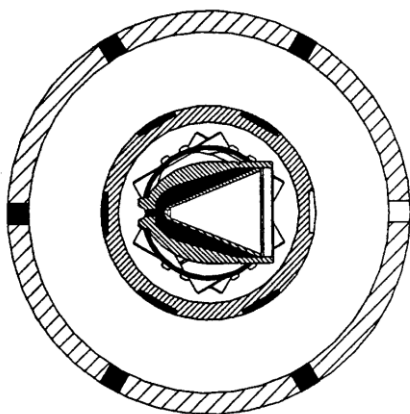

Shot Pattern

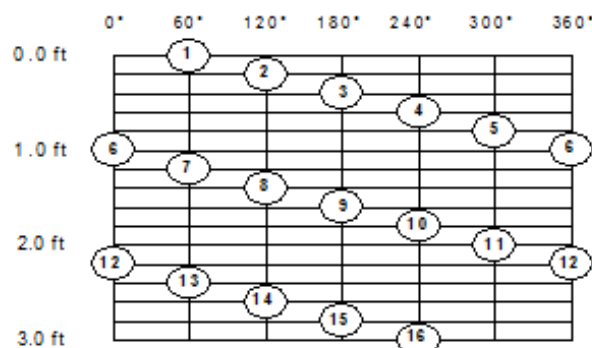

Technical Information

Carrier Specifications	
Gun Type	Expendable, Scalloped
Pressure Rating	130 MPa / 18,900 psi
Temperature Rating	230 °C / 450 °F
Tensile Strength	2,800,000 N / 630,000 lbs
Tandem Shot Spacing	0.42 m / 1.37 ft
Carrier Thread	3-15/16" - 6 TPI Acme

Shot Interval	Gun Length	Shot Total	Gun Weight w/o explosive components
4 ft	5.1 ft	21	77.2 lbs net
6 ft	7.1 ft	31	133.4 lbs net
10 ft	11.1 ft	51	190.7 lbs net
14 ft	15.1 ft	71	248.0 lbs net
20 ft	21.1 ft	101	305.3 lbs net

Only to be shot in fluid when using zinc charges

Selection Chart

Item	4ft	6ft	10ft	14ft	20ft
Gun System for 19g to 24g DP	?	?	?	?	?
Charge Tube for 19g to 24g DP	?	?	?	?	?
Gun System for 32g DP1/DP2/BH	?	?	?	?	?
Charge Tube for 32g DP1/DP2/BH	?	?	?	?	?
Gun System for 39g DP	2325370	2325371	2325372	2325373	2325374
Charge Tube for 39g DP	2325346	2325347	2325348	2325349	2325350
Gun System for 39g DP2	2325394	2325395	2325396	2325397	2325398
Charge Tube for 39g DP2	2325389	2325390	2325391	2325392	2325393
Carrier	2325356	2325358	2325359	2325360	2325361
Retention Ring	7902761				
Booster Kit	2315319				
Spacer Gun Kit	2315371				