



Configuration Schematic

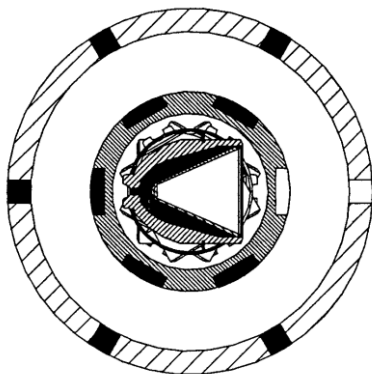

Shot Pattern

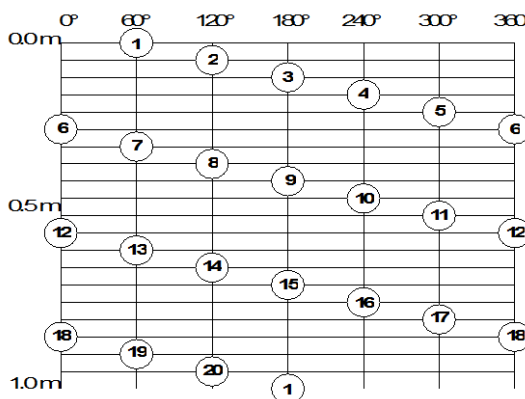

Technical Information

Carrier Specifications	
Pressure Rating	138 MPa / 20,000 psi
Temperature Rating	230 °C / 450 °F
Tensile Strength	343,000 N / 77,000 lbs
Tandem Shot Spacing	0.40 m / 1.31 ft
Carrier Thread	1.687" - 8 TPI STUB ACME


Only to be shot in fluid when using zinc charges

Shot Interval	Gun Length	Shot Total	Gun Weight w/o explosive components
1 m	1.26 m	21	8.6 kg net
2 m	2.26 m	41	15.3 kg net
3 m	3.26 m	61	22.0 kg net
4 m	4.26 m	81	28.7 kg net
5 m	5.26 m	101	35.4 kg net
6 m	6.26 m	121	42.0 kg net


Selection Chart

Item	1 m	2 m	3 m	4 m	5 m	6 m
Gun System for 6.5g DP	2315633	2315635	1315637	2315639	2315641	2315643
Charge Tube for 6.5g DP	2315661	2315663	2315665	2315667	2315670	2315672
Carrier	2315506	2315508	2315510	2315512	2315614	2315616
Retention Ring	On Demand					
Booster Kit	2315723					
Spacer Gun Kit	On Demand					

Configuration Schematic

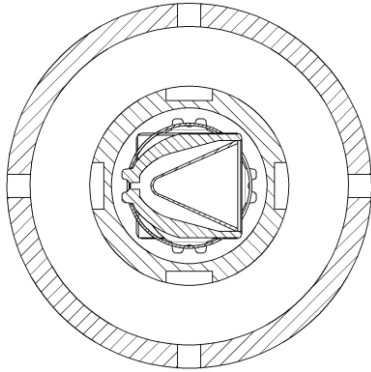

Shot Pattern

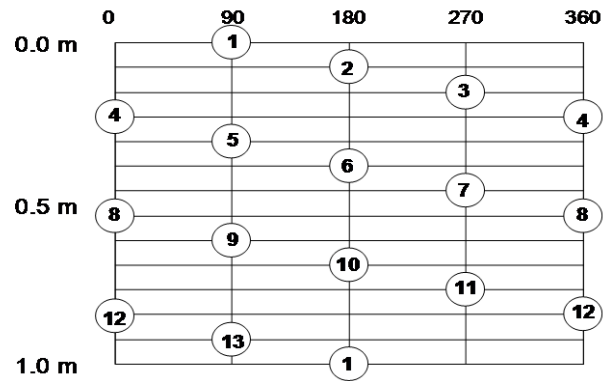

Technical Information

Carrier Specifications	
Pressure Rating	138 MPa / 20,000 psi
Temperature Rating	230 °C / 450 °F
Tensile Strength	343,000 N / 77,000 lbs
Tandem Shot Spacing	0.40 m / 1.31 ft
Carrier Thread	1.687" - 8 TPI STUB ACME

Only to be shot in fluid when using zinc charges

Shot Interval	Gun Length	Shot Total	Gun Weight w/o explosive components
1 m	1.26 m	14	8.6 kg net
2 m	2.26 m	27	15.3 kg net
3 m	3.26 m	40	22.0 kg net
4 m	4.26 m	53	28.7 kg net
5 m	5.26 m	66	35.4 kg net
6 m	6.26 m	79	42.0 kg net

Selection Chart

Item	1 m	2 m	3 m	4 m	5 m	6 m
Gun System for 6.5g DP	2315619	2315621	2315624	2315626	2315628	2315630
Charge Tube for 6.5g DP	2315647	2315649	2315651	2315654	2315656	2315658
Carrier	2315593	2315595	2315597	2315599	2315601	2315603
Retention Ring	On Demand					
Booster Kit	2315723					
Spacer Gun Kit	On Demand					