

Application

Designed to hold TTG strip charges. Engineered to retrieve TTG strip charge front caps after charge initiation.

Specifications

Top Connector Thread	Designed to adapt to firing head for strip DYNAWELL style
Bottom Connection	Designed to adapt to tandem strip adapter DYNAWELL style



Available Sizes

One size available only for 1 11/16" and 2 1/8" TTG Strip Gun Systems. See chart for lengths and shot densities available.

Recommendations

Check for damage before each run.

Shot density	Shot distance	Shot interval	Total length	Total shot
13 spm	77 mm	1 m	1.16 m	14
13 spm	77 mm	2 m	2.16 m	27
13 spm	77 mm	3 m	3.16 m	40
20 spm	50 mm	1 m	1.16 m	21
20 spm	50 mm	2 m	2.16 m	41
20 spm	50 mm	3 m	3.16 m	61

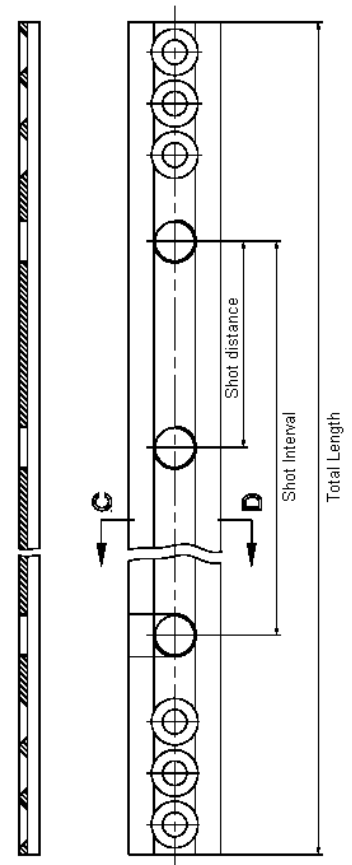

Selection Chart

Item	Part No.	Weight	Dimensions
1m Carrier Strip for 13 SPM	2315269	-	-
2m Carrier Strip for 13 SPM	2315271	-	-
3m Carrier Strip for 13 SPM	2315273	2.3 kg	3.2 x 0.04 x 0.01 m
1m Carrier Strip for 20 SPM	2315270	-	-
2m Carrier Strip for 20 SPM	2315272	-	-
3m Carrier Strip for 20 SPM	2315274	-	-